

BASED ON 6 GALLON SPILL


HTP

ON ANY SURFACE

ONE
2 Cu. Ft. bag
will solidify
6 gallons
of diesel fuel.



Sweep up
6 gallon spill
in minutes
with no oil
leaching.



Use less HTP.
Less Disposal cost.



CLAY GRANULARS

ON DRY SURFACE ONLY



7/40 lb.
bags of clay
granulars
will not
solidify the
diesel fuel.

Shovel up 360 lbs. of clay
granulars. Lengthy and
messy cleanup.
4 times more
volume. More labor.
Leaching
occurs.

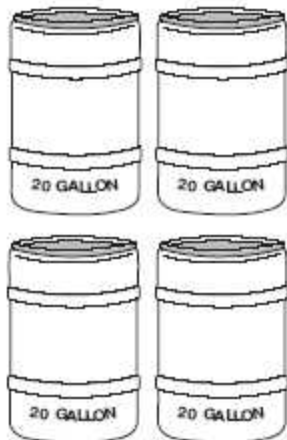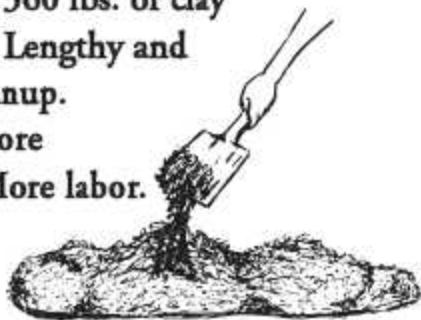

Use more clay granulars.
4 times more volume.
Disposal cost is higher.

How Other Absorbents Compare to HTP®

To Absorb 1 Gallon of 10/30 Wt. Motor Oil

<u>Product</u>	<u>Amount</u>	<u>Cost*</u>
HTP®	3 Lbs.	\$2.07
Corn Cob	16 Lbs.	\$3.90
Recycled Pulp	2 Lbs.	\$4.19
Clay	40 Lbs.	\$5.00
Polypropylene	2.5 Lbs.	\$8.50

**Approximate cost based on an average*

<u>Product Properties</u>	<u>Clay</u>	<u>Corn Cob</u>	<u>Recycled Pulp</u>	<u>Poly</u>	<u>HTP®</u>
Biodegradable		X	X		X
Bioremedial*					X
Non-Abrasive		X		X	X
Non-Leaching			X		X
Vapor Suppression					X
Non Carcinogenic		X	X	X	X
Repels Water					X

**Contains Hydrocarbon (Oil, Gas, Grease) Eating Microbes*

HTP

Chemicals Absorbed

Acetone	Ethyl Ether	Oil Base Ink
Acetonitrile	Ethylene Glycol	Paint Thinners
Amyl Acetate	Gasoline	Parafin Oil
Benzene	Heptane	Pentane
Brake Fluid	Hexane	Pentachlorophenol
Bromodichloromethane	Hexachlorobenzene	Phenol
Bromoform	Hexachlorobutadiene	Polymers
Bunker C	Hexachloroethane	Propanol
Butanol	Hexene	Resins
2 - Butanone	Hydraulic Oil	Scintillation Liquid
Canola Oil	Isobutanol	Silicon Oils
Carbon Disulfide	Isoprene	Solvents
Carbon Tetrachloride	Isopropanol	Styrene
Choloform	Jet Fuels	Tetrachloroethane
Chloromethane	Kerosene	Tetrachloroethylene
Chlorobenzene	Methanol	Tetrahydrofuran
Corn Oil	Methylene Chloride	Toluene
Cutting Oils	Methyl Ethyl Keytone	Transmission Fluid
Cyclohexane	Methylphenol	Trichloroethylene
Dichlorobenzene	Motor Oils	Trichlorophenol
Dichloromethane	Napthalene	Varsol
1,2 - Dichloroethane	2 - Nitroanaline	Vinyl Acetate
Diesel Fuels	Nitrobenzene	Vinyl Chloride
Ethanol	Oil Base Paints	Xylenes
Ethylbenzene	Oil Base Driving Fluids	

* Encapsulates Heavy Metals

General Data: Absorption: up to 12 times its weight. Reaction Time: instant. Retention: meets leachate standards. Toxicity: non-toxic, environmentally safe. Disposal: incineration or landfill in accordance with regulatory authority guidelines. Products absorbed: polychlorinated biphenyls (PCBs), fuel oil, aviation fuel, oil-based paints, crude oil, oil-based inks, vegetable oils.
